

Batch dryer TS

TORNUM's batch dryer TS can be adapted to different capacity requirements and is equipped with adjustable slides for drying smaller batches. There is a discharge section between the dryer sections and the discharge hopper, allowing for easy re-circulation of the product.



INCLUDED

- Sight glass
- Moist air channel
- Discharge section
- Buffer section






Options

- Extra buffer section
- Outdoor version inc. ladders and platforms
- Fire detection
- Different types of heat sources
- Control – time, weight or temperature
- Discharge – interval
- IIMC moisture meter






Terminal screen for PC monitoring.

Batch dryer TS2

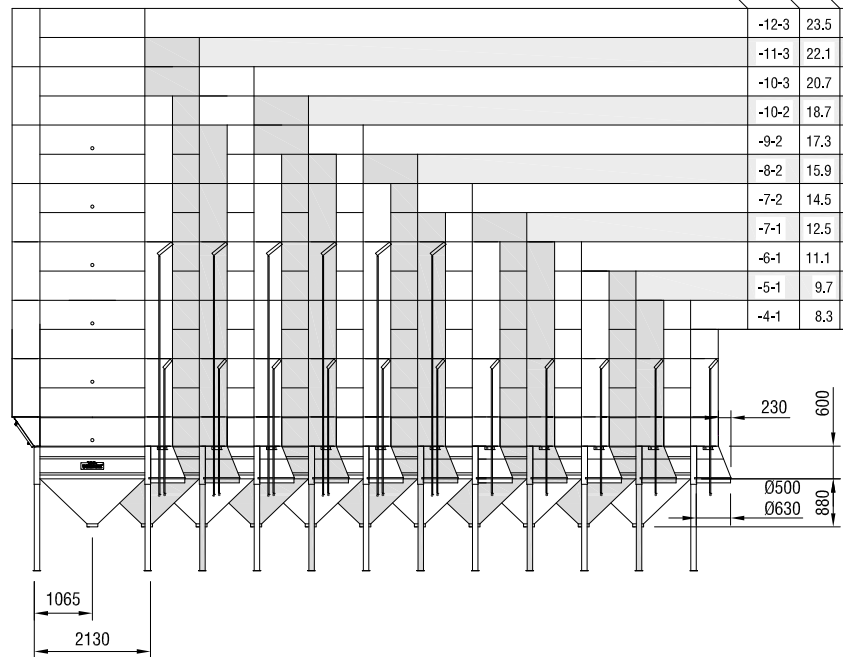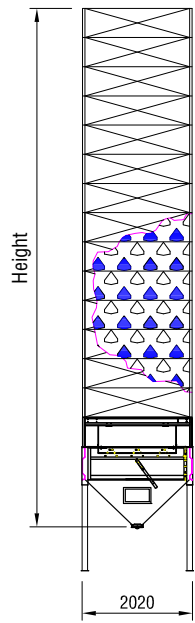

Model TS2	Volume (m³)	Height (mm)	Max energy (kW)	
-12-3	23.5	9505	640	
-11-3	22.1	8970	343	
-10-3	20.7	8435	343	
-10-2	18.7	7900	343	
-9-2	17.3	7365	343	
-8-2	15.9	6830	245	
-7-2	14.5	6295	245	
-7-1	12.5	5760	245	
-6-1	11.1	5225	179	
-5-1	9.7	4690	179	
-4-1	8.3	4155	179	

Batch dryer TS3

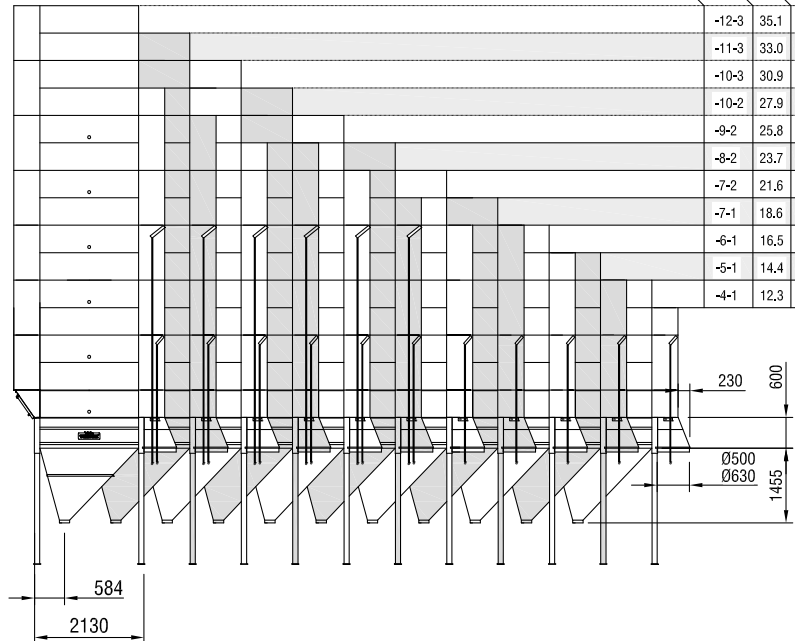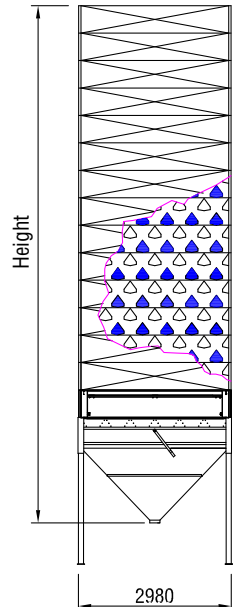

Model TS3	Volume (m³)	Height (mm)	Max energy (kW)	
-12-3	35.1	10080	640	
-11-3	33.0	9545	640	
-10-3	30.9	9010	640	
-10-2	27.9	8475	640	
-9-2	25.8	7940	640	
-8-2	23.7	7405	343	
-7-2	21.6	6870	343	
-7-1	18.6	6335	343	
-6-1	16.5	5800	245	
-5-1	14.4	5265	245	
-4-1	12.3	4730	245	

